

# ASSA ABLOY

## ACOUSTIC DOOR

### 2 hr fire rated, 50 Rw, Interconnecting Acoustic / Smoke / Fire doorset

#### DESCRIPTION

Pyropanel AS-INTERCON-A is a 50 Rw, 2 hour fire rated interconnecting door leaf arrangement in a single frame, with perimeter seals and bottom seals.

#### APPLICATIONS

Ideal for interconnecting rooms that require up to 2 hours of fire rating and an acoustic rating of 50 Rw.

#### FEATURES

##### Acoustic Rating

- 50 Rw

##### Fire Resistance

- Up to -/120/30

##### Smoke Resistance

- Meets the NCC requirement for a smoke door.

##### Door Configuration

- Two doors in a single frame. (Interconnecting)

##### Thickness

- Both doors 48mm (nom.)

##### Door Weight

- Doors approx 22 kg/m<sup>2</sup> & 36 kg/m<sup>2</sup>

##### Size

- Maximum Size - 2400mm high x 1200mm wide.

##### Frame



- Double rebated KDHW timber (limited to 1hr fire rating) or Steel Euroseal door frame, designed to receive one door on each side. The separation distance between the leaves is 80mm (min.)

##### Seal combination:

Door Type	Perimeter	Bottom	Rw
AS-INTERCON-A	Euroseal	RP38si	50

#### INSTALLATION

Door frame must be tightly sealed against wall structure using Pyropanel Pyroseal fire and acoustic sealant. Steel door frames will require filling with fire rated plasterboard, Pyropanel light weight M4 Mortar, concrete or mortar to achieve the desired acoustic rating. Internal door hardware must be offset to prevent any clashing when both leaves are closed.

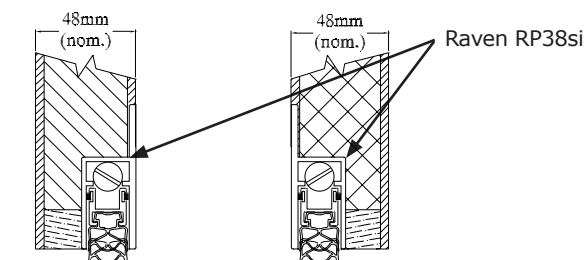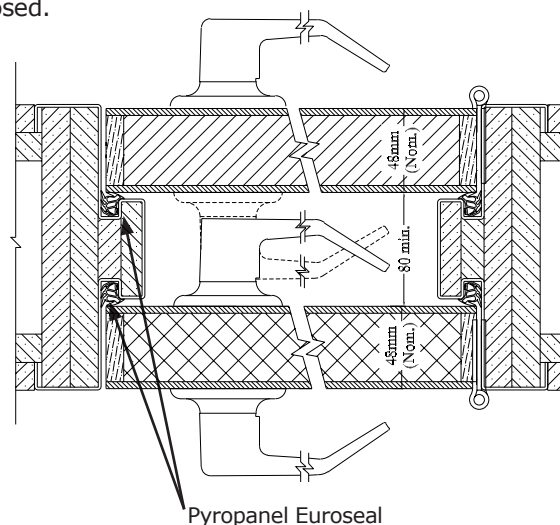

#### HOW TO SPECIFY

"Door to be a Pyropanel AS-INTERCON-A acoustic interconnecting doorset, installed into a Pyropanel fire-rated filled steel\* Euroseal door frame".

\* denotes example - delete, change or specify as required

**Pyropanel Developments Pty Ltd**  
235 Huntingdale Rd, Oakleigh, Vic 3166  
Ph: **(03) 9837 8500** Fax: (03) 9837 8550  
Email: **sales@pyropanel.com.au**  
Web: **www.pyropanel.com.au**

**Distributed by:**  
**Nexdor Systems**  
Ph: **(03) 5450 3457**  
Email: **estimating@nexdorsystems.com.au**  
Web: **www.nexdorsystems.com.au**



Pyropanel Developments has a policy of continuous improvement and reserves the right to change methods and specifications without notice.  
Note: The Tech Sheet is an uncontrolled document, If printed please refer to the Tech-Sheet on the website to check if this document is valid.