

## **ASSA ABLOY**

## **ACOUSTIC DOOR**

# 47 Rw, Single leaf, Acoustic Doorset (up to 47 Rw), non-fire rated

#### **DESCRIPTION**

Pyropanel AS-SPECIAL-A is a non-fire rated single leaf acoustic doorset (up to 47 Rw) system using various perimeter and bottom seals.

### **APPLICATIONS**

Ideal for applications that require an extremely high acoustic rating.

#### **FEATURES**

#### **Acoustic Rating**

Up to 47 Rw.

### **Door Configuration**

Single leaf

#### **Thickness**

48mm (nominal)

#### **Door Weight**

Approx 85 kg/m<sup>2</sup>

#### Size

Maximum size - 2400 x 1200mm

#### Hinges

Minimum 4 heavy duty steel hinges.

Pyropanel Euroseal steel frame (heavy duty & backgrouted)

Steel to both faces and edges (steel-wrapped)

#### **Seal Combinations**

Door Type	Perimeter	Bottom	Rw
AS-SPECIAL-A1	Pyropanel Euroseal	Raven RP38si	44
AS-SPECIAL-A2	Pyropanel Euroseal	Raven RP38si + Pyropanel PY-CS1 corner seals	45
AS-SPECIAL-A3	Pyropanel Euroseal	Pyropanel Pyrosill	45
AS-SPECIAL-A4	Pyropanel Euroseal + Kilargo IS7010si or IS7020si	Pyropanel Pyrosill + Kilargo IS3080si	47


Note: Steel wrapped door skins require special tooling. Please check with your Pyropanel Distributor for availability in your area.


#### **OPTIONAL EXTRAS**

- Pre-hung in steel frame
- Stainless steel faces

#### **INSTALLATION**

This door is very heavy, and the frame must be securely attached to the wall structure. The wall should be desgined to withstand a doorset of this weight. The frame must then be tightly sealed to the wall structure using Pyropanel Pyroseal acoustic sealant. Steel door frames require packing with Pyropanel light weight M4 mortar, concrete or mortar to achieve the desired acoustic rating.

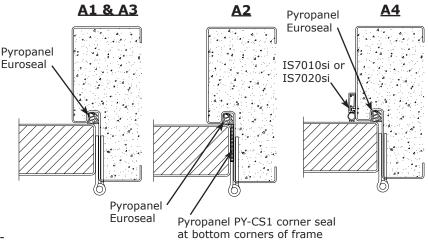

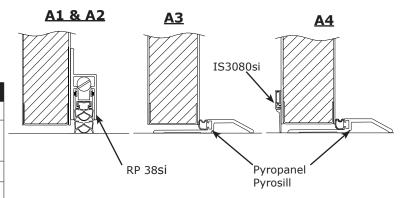

#### **HOW TO SPECIFY**

"Door to be a Pyropanel AS-SPECIAL-A1\* acoustic door installed in a packed heavy duty steel door frame".

\* denotes example - delete, change or specify as required

## **Pyropanel Developments Pty Ltd**

235 Huntingdale Road, Oakleigh Sth, Vic 3166 Ph: (03) 9837 8500 Fax: (03) 9837 8550

Email: sales@pyropanel.com.au Web: www.pyropanel.com.au

#### Distributed by:

**Nexdor Systems** Ph: (03) 5450 3457

Email: estimating@nexdorsystems.com.au

Web: www.nexdorsystems.com.au



Pyropanel Developments has a policy of continuous improvement and reserves the right to change methods and specifications without notice. Note: The Tech Sheet is an uncontrolled document, If printed please refer to the Tech-Sheet on the website to check if this document is valid.